

Robotic Conduit Liners Standard Features:


- Tapered lead in angle on the machined conduit stop making the transition of the welding wire into the MIG gun smoother.
- Tin/zinc plated wire.

R44 Series Conduit

R45 Series Conduit

Steel Welding Wire

Wire Size	Part No. Stock No.	Wire Size	Part No. Stock No.
.035" / .045"	R44-3545-1	.035" / .045"	R45-3545-1
0,9mm / 1,2mm	1440-1223	0,9mm / 1,2mm	1450-1023
.035" / .045"	R44-3545-4	.035" / .045"	R45-3545-4
0,9mm / 1,2mm	1440-1224	0,9mm / 1,2mm	1450-1024
.035" / .045"	R44-3545-8	.035" / .045"	R45-3545-8
0,9mm / 1,2mm	1440-1225	0,9mm / 1,2mm	1450-1025
.035" / .045"	R44-3545-15	.035" / .045"	R45-3545-15
0,9mm / 1,2mm	1440-1226	0,9mm / 1,2mm	1450-1026
.052" / 1/16"	R44-116-1	.052" / 1/16"	R45-116-1
1,53mm / 1,6mm	1440-1228	1,53mm / 1,6mm	1450-1028
.052" / 1/16"	R44-116-4	.052" / 1/16"	R45-116-4
1,53mm / 1,6mm	1440-1229	1,53mm / 1,6mm	1450-1029
.052" / 1/16"	R44-116-8	.052" / 1/16"	R45-116-8
1,53mm / 1,6mm	1440-1230	1,53mm / 1,6mm	1450-1030
.052" / 1/16"	R44-116-15	.052" / 1/16"	R45-116-15
1,53mm / 1,6mm	1440-1231	1,53mm / 1,6mm	1450-1031

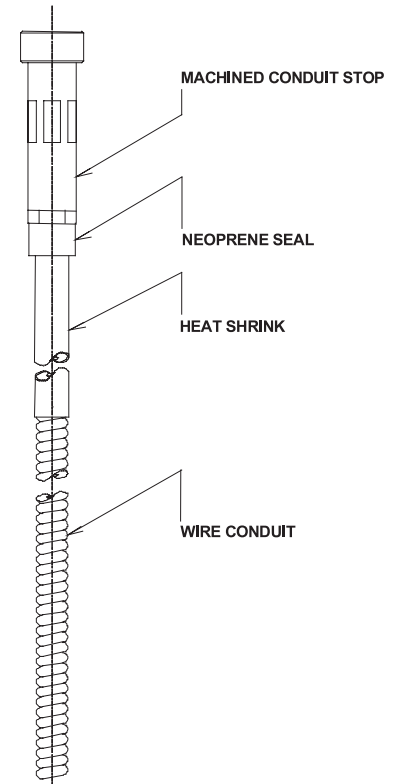

Aluminum Welding Wire

Wire Size	Part No. Stock No.	Wire Size	Part No. Stock No.
.035" / .045"	R44WN-3545-4	.035" / .045"	R45WN-3545-4
0,9mm / 1,2mm	1440-1040	0,9mm / 1,2mm	1450-1041
.035" / .045"	R44WN-3545-8	.035" / .045"	R45WN-3545-8
0,9mm / 1,2mm	1440-1041	0,9mm / 1,2mm	1450-1042
.035" / .045"	R44WN-3545-15	.035" / .045"	R45WN-3545-15
0,9mm / 1,2mm	1440-1042	0,9mm / 1,2mm	1450-1043
1/16"	R44WN-116-8	1/16"	R45WN-116-8
1,6mm	1440-1046	1,6mm	1450-1044
1/16"	R44WN-116-15	1/16"	R45WN-116-15
1,6mm	1440-1047	1,6mm	1450-1045

Note: R44 series conduits are shipped with all Euro-Kwik Torch and Cable Assemblies
"WN" = Wire Nylon Wrapped

Bronze Jump Liner Part No. AWC44-116 (Stock No. 1644-1085)

The use of a jump liner improves arc starts and provides an improved current transfer between the contact tip and aluminum wire. The jump liner can also be used for wear issues found with the liner inside the conductor tube area when using stainless steel wires.