



## 600 Amp – SUPRA MIG Guns


### NOZZLES

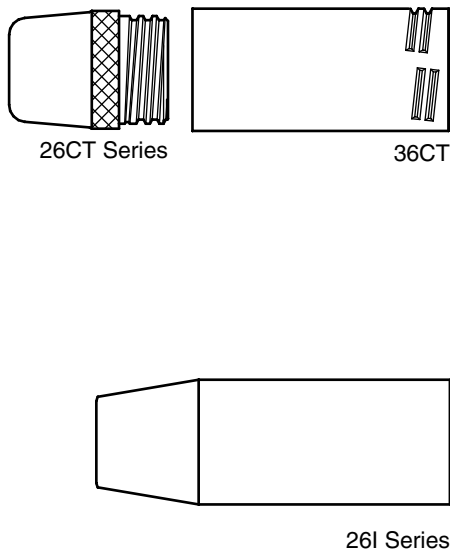


### CONTACT TIPS



### GAS DIFFUSERS



### CONDUCTOR TUBE

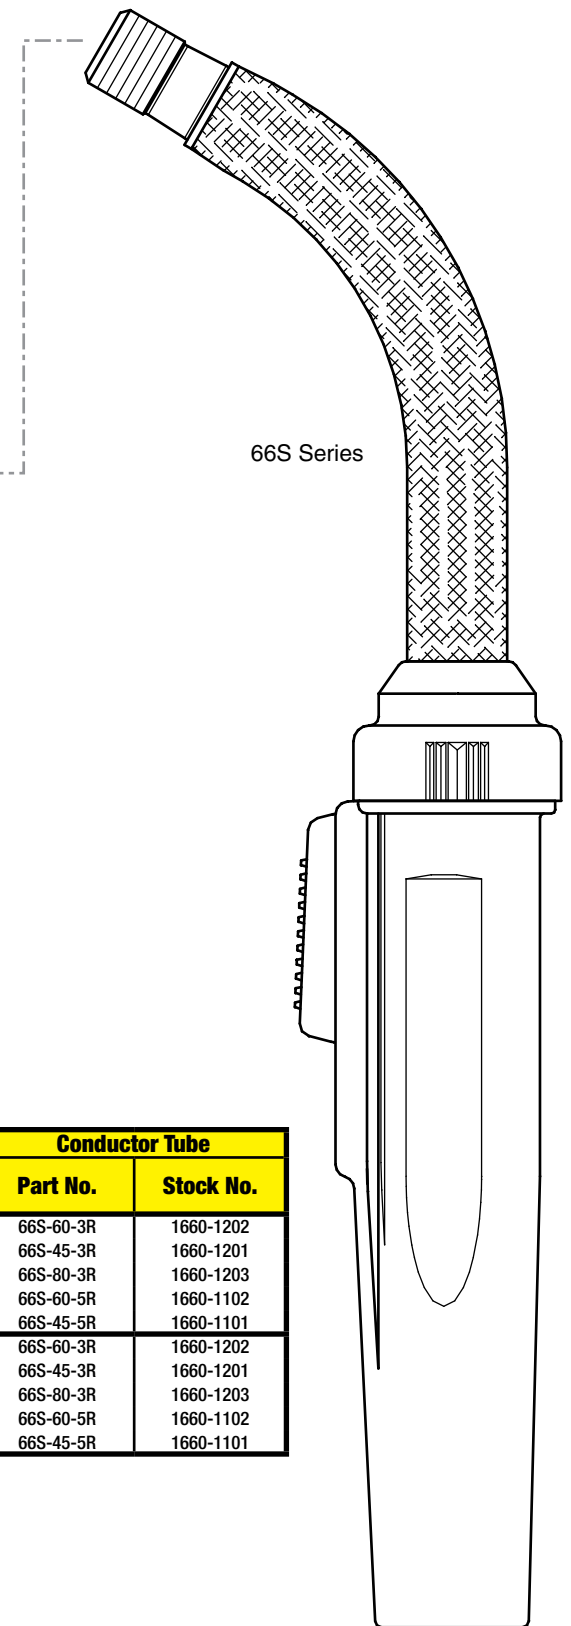

Nozzle Style	Bore Diameter (in/mm)	Part No.	Stock No.	Nozzle/Contact Tip Relationship	Gas Diffuser		Conductor Tube	
					Part No.	Stock No.	Part No.	Stock No.
Thread-On (A)	5/8" (15,9mm)	26CT-62	1260-1420	1/8" (3,2mm) Tip Recess – Coarse Thread	56S-SW (1)	1560-1100	66S-60-3R	1660-1202
	3/4" (19,5mm)	26CT-75	1260-1430	1/8" (3,2mm) Tip Recess – Coarse Thread	56S-H (1)	1560-1101	66S-45-3R	1660-1201
Thread-On	5/8" (15,9mm)	26I-62	1260-1120	1/8" (3,2mm) Tip Recess	56S-SW (1)	1560-1100	66S-60-3R	1660-1202
	3/4" (19,5mm)	26I-75	1260-1130	1/8" (3,2mm) Tip Recess	56S-H (1)	1560-1101	66S-45-3R	1660-1201
	7/8" (22,23mm)	26I-87	1260-1140	1/8" (3,2mm) Tip Recess			66S-80-3R	1660-1203
							66S-60-5R	1660-1102
							66S-45-5R	1660-1101

NOTE: Threaded-On (A) nozzles require a nozzle insulator – Part No. 36CT (Stock No. 1360-1400)  
 Gas diffusers that contains the letter "H", use with 45-564, 45N-116, 45H-332, and 45-18 Conduit Liner  
 The (#) after the Gas Diffuser Part No. indicates the series of Contact Tip that can be used with the particular diffuser. Refer to Contact Tip Chart – column "Gas Diffuser"

### Contact Tips

Wire Size in/mm	Tip I.D. in/mm +/- .003" (0,08mm)	Part No.	Stock No.	Part No.	Stock No.	Part No.	Stock No.	Part No.	Stock No.	Gas Diffuser				
.035" (0,9mm)	.044" (1,12mm)	16S-35	1160-1102	16ST-35	1160-1135					(1)				
.040" (1,0mm)	.048" (1,22mm)	16S-40	1160-1103	16ST-40	1160-1136									
.045" (1,2mm)	.054" (1,37mm)	16S-45	1160-1104	16ST-45	1160-1137									
.052" (1,3mm)	.064" (1,65mm)	16S-52	1160-1105	16ST-52	1160-1138									
1/16" (1,6mm)	.073" (1,85mm)	16S-116	1160-1106	16ST-116	1160-1139									
5/64" (2,0mm)	.090" (2,29mm)	16S-564	1160-1109											
3/32" (2,4mm)	.106" (2,67mm)	16S-332	1160-1110											
7/64" (2,8mm)	.120" (3,05mm)	16S-764	1160-1111											
1/8" (3,2mm)	.144" (3,66mm)	16S-18	1160-1112											
3/64"AL (1,2mm)	.059" (1,50mm)	16AS-364	1160-1113											
1/16"AL (1,6mm)	.082" (2,08mm)	16AS-116	1160-1114											
.030" (0,8mm)	.038" (0,97mm)	16RS-30	1160-1482	16RST-30	1160-1483									(1)
.035" (0,9mm)	.044" (1,12mm)	16RS-35	1160-1468	16RST-35	1160-1475									
.040" (1,0mm)	.048" (1,22mm)	16RS-40	1160-1469	16RST-40	1160-1476									
.045" (1,2mm)	.054" (1,37mm)	16RS-45	1160-1470	16RST-45	1160-1477									
.045" (1,2mm)	.054" (1,37mm)	16RS-45C	1160-1473	16RST-45C	1160-1480									
.052" (1,3mm)	.064" (1,65mm)	16RS-52	1160-1471	16RST-52	1160-1478									
1/16" (1,6mm)	.073" (1,85mm)	16RS-116	1160-1472	16RST-116	1160-1479									
.052" (1,3mm)	.064" (1,65mm)	16RS-52	1160-1471	16RST-52	1160-1478									
1/16" (1,6mm)	.073" (1,85mm)	16RS-116	1160-1472	16RST-116	1160-1479									
1/16" (1,6mm)	.073" (1,85mm)	16RS-116	1160-1472	16RST-116	1160-1479									

### Conduit Liners

Wire Size	15 ft. (5M)		25 ft. (8M)	
	Part No.	Stock No.	Part No.	Stock No.
.035" (0,9mm) - .045" (1,2mm)	45-3545-15	1450-1103	45-3545-25	1450-1105
.052" (1,3mm) - 1/16" (1,6mm)	45-116-15	1450-1113	45-116-25	1450-1115
5/64" (2,0mm)	45-564-15	1450-1123	45-564-25	1450-1125
3/32" (2,4mm)	45H-332-15	1450-1133		
7/64" (2,8mm)	45H-764-15	1450-1143		
1/8" (3,2mm)	45-18-15	1450-1153		
.030" (0,8mm) - .3/64" (1,2mm) AL	45N-3545-15	1450-1003		
1/16" (1,6mm) AL	45N-116-15	1450-1013		

Note: Aluminum wire conduit not recommended for lengths over 10ft. (3M)  
 AL – Aluminum