

400 amp Diffusers



WC53-EL




QTRW54

Standard Features:

- Machined from solid brass alloy bars.
- Twelve gas holes, .094" (2,38mm) Ø for increased gas distribution over the standard 6 hole design.
- A machined groove around the outside diameter of the gas diffusers to aid in cutting replacement conduit.

Part No.	Stock No.	
WC53-EL	1525-1140	Use with EL16RS tips
QTRW54	1544-1125	Use with 14RS or 14RZ tips
QTRW54-16	1544-1126	Use with 16RS or 16RZ tips

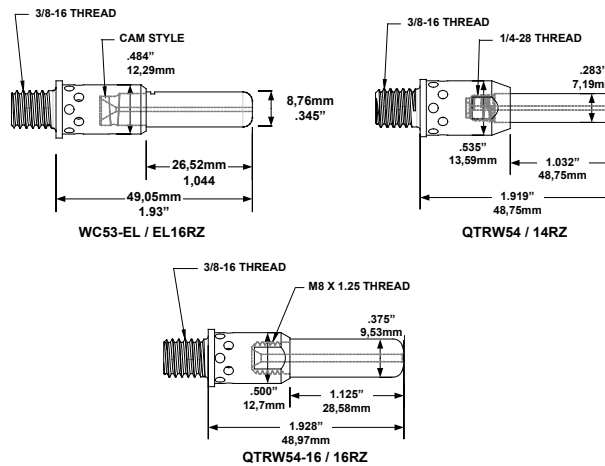

600 amp Diffusers



WC56-EL-SW



QTRW56-SW

Standard Features:

- Machined from solid brass alloy bars.
- Twelve gas holes, .094" (2,38mm) Ø for increased gas distribution over the standard 6 hole design.
- A machined groove around the outside diameter of the gas diffusers to aid in cutting replacement conduit.

Part No.	Stock No.	Stock No.
WC56-EL-SW	1560-1146	Use with EL16RS tips – Conduit 1/16" wire Max
WC56-EL-H	1560-1147	Use with EL16RS tips – Conduit 5/64" & larger
QTRW56-SW	1564-1125	Use with 16RS tips – Conduit 1/16" wire - Max
QTRW56-H	1564-1126	Use with 16RS tips – Conduit 5/64" & larger

