

> Check out www.tweco.com for more information on product updates

Spray Master® MIG Gun Series

with dual schedule rocker switch feature built into the MIG gun handle.

Trust Tweco to provide you with the **Coollest MIG Gun for your Hottest Spray and Pulse welding applications.**

Conductor tube can be rotated easily for different welding positions

Three binder-post design increases durability

Ergonomic handle – balanced at the center of the handle – to reduce operator fatigue

Extended trigger length to reduce radiated heat

NEW FEATURES

Consider Spray Master's "versatility" to fit your welding requirements . . . Looking for a MIG gun for dual schedule applications . . . Got It!!


- On/Off control with your gloved thumb
- Offered on 350 & 450 amp series only
- Identified with a suffix "DSRS" at the end of the Part No.
- Switch face recessed into handle to prevent damage

Need a MIG gun with easy to use locking trigger . . . Got It!!

- Engage trigger – press pin in and release trigger
- Offered on 450 amp series only
- Identified with a suffix "LC" at the end of the Part No.




Three layers of conductor tube – inner copper tube, middle silicon-resin insulator, outer metal jacket – for improved heat insulation.

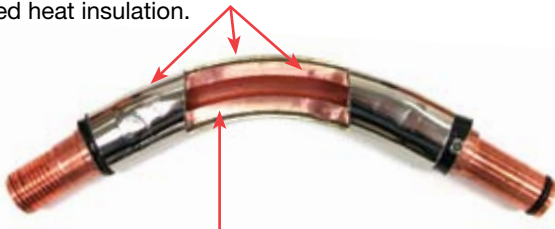

Heavy duty conductor tube with thick copper walls enables higher current carrying capacity, and additionally the thicker walls act as "heat sink" and resist bending.



Contact tip "seats" on the diffuser for improved electrical conductivity – primary path of electricity.

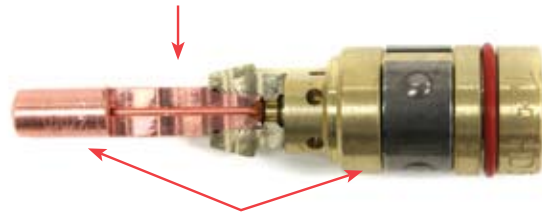

Heavy duty contact tip and thick-walled diffuser also act as a heat-sink to help the front-end run cooler.

> www.tweco.com

MIG GUN ASSEMBLY		Rear Connector Style (Part No./Stock No.)			
Wire Size	Gun Length	Tweco®	Miller®	Lincoln®	Euro-Kwik™
.035"/.045" (0,9- 1,2mm)	12ft (4M)	MS212-3545 1023-1101	MS212M-3545 1023-1111	MS212L-3545 1023-1136	MS212X-3545 1023-1126
	15ft (5M)	MS215-3545 1023-1102	MS215M-3545 1023-1112	–	MS215X-3545 1023-1127
	25ft (8M)	–	MS225M-3545 1023-1118	–	MS225X-3545 1023-1133

MIG GUN ASSEMBLY		Rear Connector Style (Part No./Stock No.)		
Wire Size	Gun Length	Tweco	Miller	Lincoln
.045"/1/16" (1,2mm-1,6mm)	10ft (3M)	MS310-116 1036-1610	MS310M-116 1036-1635	–
	12ft (4M)	MS312-116 1036-1613	MS312M-116 1036-1638	MS312L-116 1036-1646
	15ft (5M)	MS315-116 1036-1615	MS315M-116 1036-1647	MS315L-116 1036-1647
	15ft (5M)	MS315-116K4 1036-1715	MS315M-116K4 1036-1716	MS315L-116K4 1036-1717
	15ft (5M)	MS315-116DSRS 1036-1721	MS315M-116DSRS 1036-1720	MS315L-116DSRS 1036-1722
	25ft (8M)	–	MS325M-116 1036-1640	–

MIG GUN ASSEMBLY		Rear Connector Style (Part No./Stock No.)			
Wire Size	Gun Length	Tweco	Miller	Lincoln	Euro-Kwik
.045"/1/16" (1,2mm-1,6mm)	12ft (4M)	MS412-116 1040-1051	MS412M-116 1040-1061	–	MS412X-116 1040-1076
	15ft (5M)	MS415-116 1040-1052	MS415M-116 1040-1062	MS415L-116 1040-1072	MS415X-116 1040-1077
	15ft (5M)	MS415-116K4 1040-1530	MS415M-116K4 1040-1531	MS415L-116K4 1040-1533	–
	15ft (5M)	MS415-116DSRS 1040-1537	MS415M-116DSRS 1040-1536	MS415L-116DSRS 1040-1538	–
	15ft (5M)	–	MS415M-116LC 1040-1092	MS415L-116LC 1040-1074	–
	15ft (5M)	–	MS415M-116LM 1040-1063	MS415L-116LM 1040-1073	–
	20ft (6M)	MS420-116 1040-1059	MS420M-116 1040-1064	–	–
	20ft (6M)	–	MS420M-116DSRS 1040-1539	–	–
	25ft (8M)	MS425-116 1040-1058	MS425M-116 1040-1068	MS425L-116 1040-1071	–
	25ft (8M)	–	MS425M-116DSRS 1040-1540	–	–

Miller is a registered trademark of Illinois Tool Works, Inc. Lincoln is a registered trademark of Lincoln Electric Co. The above mentioned registered trademarks are in no way affiliated with Tweco Products, Inc. or Thermadyne Industries Inc. Tweco is registered trademark of Thermadyne Industries, Inc.

U.S. Customer Care: 800-426-1888 / FAX 800-535-0557 • Canada Customer Care: 905-827-4515 / FAX 800-588-1714
International Customer Care: 940-381-1212 / FAX 940-483-8178 • www.tweco.com



WORLD HEADQUARTERS: 16052 Swingley Ridge Road, Suite 300 • St. Louis, Missouri 63017 U.S.A.

A Global Cutting & Welding Market Leader™