

Front End Consumables For TAM and RA Series MIG Gun and Cable Assembly


Standard Features:

- The HD24LB and HD26B style nozzle assembly is made up of three (3) component parts:
 - Nozzle Housing — made from a red brass alloy tubing, which is cut to length and formed to size.
 - Nozzle Insert — made from a solid brass alloy with internal threads allowing the nozzle assembly to be threaded onto the conductor tube.
 - Nozzle Insulator — made from G7 silicone material and provides the insulation needed from the conductor tube and nozzle housing.
- Use diffuser series MS54 and HD54 with this style of nozzle assembly.

400 Amp Nozzle – Heavy Duty – Slip-On Type


**HD26B Series Nozzle – Adjustable
1/8" (3,2mm) Tip Recess**

Bore Size "A"	Part No.	Stock No.
.625"-15,9mm	HD26B-62	1260-1285
.750"-19,1mm	HD26B-75	1260-1286

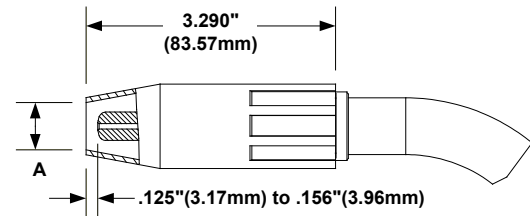

**HD24LB Series Nozzle – Adjustable
1/8" (3,2mm) Tip Recess**

Bore Size "A"	Part No.	Stock No.
.500"-12,7mm	HD24LB-50	1240-1215
.625"-15,9mm	HD24LB-62	1240-1216
.750"-19,1mm	HD24LB-75	1240-1217

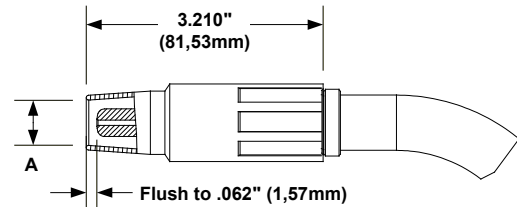

**HD24LB Series – Adjustable
Tip Flush**

Bore Size "A"	Part No.	Stock No.
.500"-12,7mm	HD24LB-50F	1240-1218
.625"-15,9mm	HD24LB-62F	1240-1219

