




For Use with 300 Series Torch Handles

Heavy Duty Cutting Attachments • 300 Series

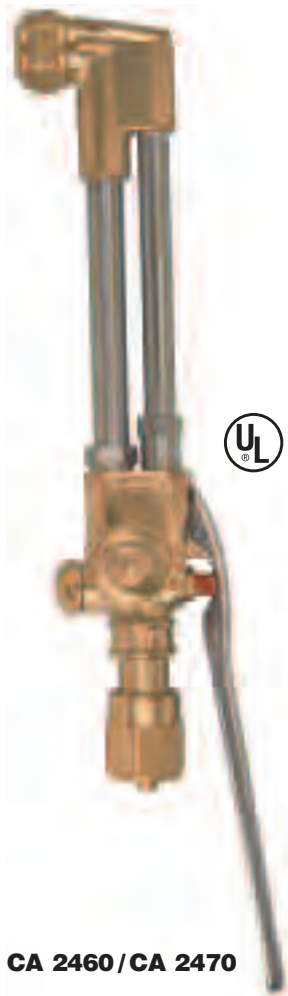

**Outfits with 2460 Series
Cutting Attachments:**

- Journeyman®
- Journeyman® II
- Journeyman® "Select™"

See *Outfits Section G*

Victor Cutting Attachments

Performance matched for each torch handle series.

CONSTRUCTION/FEATURES

- Die-Forged Brass Head
- Spiral mixer blends Oxygen & Fuel
- Smooth Cutting Valve (Push Type)
- Stainless Steel Tubes
- Brass Coupling Nut & Double "O" Ring tapered seal gives quick gas-tight seal without a tightening wrench
- Length 10-1/2" - Weight 32 oz. (.99 kg)

NOTE: The shape of the cutting attachment is a registered trademark of Victor®.

**CA2460 / CA2461 / CA2462 / CA2470
HEAVY DUTY CUTTING ATTACHMENT
ORDERING INFORMATION**

For use with H315FC, 315FC Series torch handles. **All Fuel Gases**

Part Number	Model Number	Cutting Range	Tip Series	Head Angle
0381-0816	CA2460	8"/200mm	1	90°
0387-0000	CA2460 (Clamshell)	8"/200mm	1	90°
0381-0817	CA2461	8"/200mm	1	75°
0381-0818	CA2462	8"/200mm	1	180°
0381-0823	CA2470	7"/175mm	3	90°

CA 2460 / CA 2470

Fuel Gas Usage: Can be used with all fuel gases with the proper cutting tip.
See **Tip/Apparatus User Guide**, Section E pages 87-90.

Design and Construction

CA2460 Illustrated

Stainless Steel Lever
for extra durability

Brass Coupling Nut & Double "O" Ring Seal
gives quick gas-tight seal without a tightening wrench

Smooth Cutting Oxygen Valve
for precise ease-on control (push type)

Forged Brass Body

Spiral Mixer
blends oxygen and all fuel gases for optimum performance

Stainless Steel Tubes
for added torch strength and heat resistance

Die-Forged Brass Head
for maximum durability

